TS.4204 Door Closer

Silver (SE)

Satin Nickel Plate (SNP)

Polished Nickel Plate (PNP)

Electro Brass (PVD)

Product Overview

- ✔ Variable power adjustment EN2-4
- ✔ Engineered from exceptional high quality components
- ✔ CE marked and UL listed
- ✔ Universal fitting
- ✔ Back check and delayed action features are as standard on this model
- ✔ Easy to read instructions, saving over 12 minutes of fitting time
- ✔ Corrosion Grade 3 – Recommended for internal use

c UL us

CE 1720

Specification Overview

Fire Tested to EN1634 & UL 10C

Max Door Weight 80kg

Opening Angle 180°

Max Door Width 1100mm

Adjustable Closing Speed

Guarantee

Universal Application

Power Size EN2-4

Adjustable Delayed Action

Back Check

4204DABC-CPR131218

Rut Lock

IFCC 1433

Mechanism

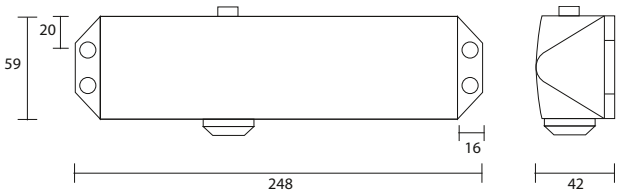

Cover

All dimensions shown are in mm.

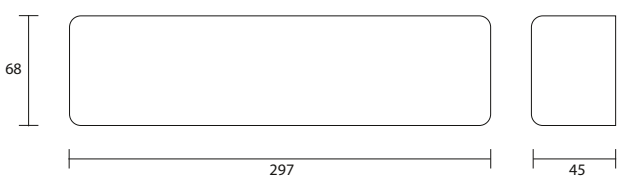

For fitting instructions see website - www.rutlanduk.co.uk

Technical Information

BS EN 1154 Classification

TS.4204 door closers have been independently tested to conform with the EN 1154 performance standard. They are CE marked and classified as follows:

Standard Arm Fig 1.

4	8	4/2	1	1	3

BS EN 1634 Fire Test

TS.4204 closers have been tested to EN 1634 for 30, 60 and 120 minute door sets. Test certificates are available on request.

Options

- Hold-Open arm (Not to be used on fire doors)
- Drop plate

Options not covered by CE.

Other Benefits

- Painted and Plated finishes

Description	EN Size	Finish	Re-order Code	Product Code	Box Qty
TS.4204 Combined unit closer, flat bar armset, cover, PA bracket with DELAYED ACTION & BACK CHECK	2-4	Silver	**12109**	TS.4204DABC.SLFB.SESE	6
	2-4	Satin Nickel	**12110**	TS.4204DABC.SLFB.SNPSNP	6
	2-4	Polished Nickel	**12111**	TS.4204DABC.SLFB.PNPPNP	6
	2-4	Electro Brass	**12112**	TS.4204DABC.SLFB.PVDPVD	6