

TS.11204 Slide Arm Closer

Power Adjustable
EN2-4 by
Spring



Silver (SE)



Satin Nickel Plate (SNP)



Polished Nickel Plate (PNP)



Electro Brass (PVD)



Antique Brass (AB)

Product Overview

- ✓ Variable power size EN 2-4
- ✓ CE marked and UL listed
- ✓ Universal fitting
- ✓ Renown for high efficiency & ease of opening
- ✓ Easy to read instructions, saving over 12 minutes fitting time
- ✓ Corrosion Grade 3 – Recommended for internal use



1720

Specification Overview




Fire Tested to EN1634



Max Door Weight up to 80kg



Opening Angle 110°



Max Door Width 1100mm



Universal Application



Adjustable Closing Speed



IFCC 1438



Power Size EN2-4



Adjustable Latch Speed



Guarantee



11204TS0 CPR191118

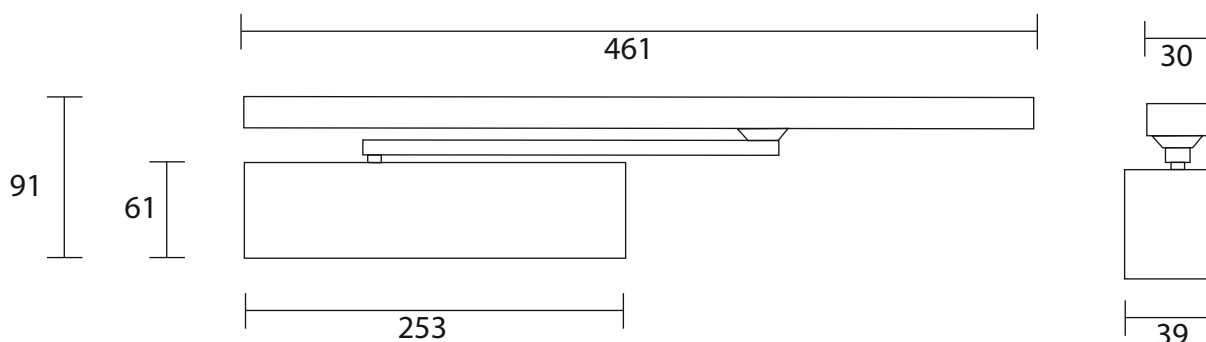


Min Door 857mm fig30



Rut Lock

All dimensions shown are in mm.



For fitting instructions see website - www.rutlanduk.co.uk

Technical Information

BS EN 1154 Classification

TS.11204 door closers have been independently tested to conform with the EN 1154 performance standard. They are CE marked and classified as follows:

3 8 $\frac{2}{4}$ 1 1 3

BS EN 1634 Fire Test

TS.11204 door closers have been tested to EN 1634 Fire Pressure Test for, 30 and 60 minutes on a TFTDoor and TFCDor.

ADA Compliant

Fire doors shall have a minimum opening force allowable by the appropriate administration authority, and doors other than fire doors 5 pounds maximum opening force (22.2N) from push or pull side.

UL Listed

The TS.11204 has been certified and labelled to the Underwriters' Laboratories (UL) testing, inspection, certification, auditing and validation.

ITT Timber Leaf & Timber Frame

May be fitted Standard, Parallel arm or Transom fixing position on previously tested single-acting, latched or unlatched, intumescent sealed timber door and timber frame assemblies.

Options






































- Mechanical hold open slide rail (*Not to be used on fire doors. Not covered by CE*)
- Back check available as a cushion stop in the rail
- Anti-ligature
- For uninsulated doors see code in components list for intumescent kit

Other Benefits

- BS8300 & ADA.cv door closer helping the less able (min door size 857mm)

Fenwick House, Brighton College

TS.11204 Components

Description	EN Size	Finish	Re-order Code	Product Code	Box Qty
 <p>TS.11204 cam action slide arm door closer combined unit (with SA.2 rail and connector bar - CB.5)</p>	2-4	Silver 	11352	TS.11204.SR.2.SESE	6
		Satin Nickel 	11354	TS.11204.SR.2.SNPSNP	6
		Polished Nickel 	11347	TS.11204.SR.2.PNPPNP	6
		Electro Brass 	11349	TS.11204.SR.2.PVDPVD	6
		Antique Brass 	12027	TS.11204.SR.2.ABAB	6
		Colour Coated 	11350	TS.11204.SR.2.RALRAL	6
 <p>TS.11204 cam action with Square cover</p>	2-4	Satin Nickel 	11345	TS.11204.SQ.2.SSSSNP	6
 <p>TS.11000 series semi radius cover</p>	-	Silver 	11291	SR.114.SE	25
		Satin Nickel 	11292	SR.114.SNP	25
		Polished Nickel 	11289	SR.114.PNP	25
		Electro Brass 	11290	SR.114.PVD	25
		Antique Brass 	12025	SR.114.AB	25
 <p>TS11204 concealed door closer-to-slide arm connector bar options (single action not handed)</p>	-	Silver 	11022	CB.5.SE	50
		Satin Nickel 	11023	CB.5.SNP	50
		Polished Nickel 	11020	CB.5.PNP	50
		Electro Brass 	11021	CB.5.PVD	50
		Antique Brass 	12023	CB.5.AB	50
Optional Mounting Bracket	-	-	11179	MP.114	10
 <p>461mm long Slide Rail for surface or concealed fixing</p>		Silver 	11247	SA.2.SE	25
		Satin Nickel Plate 	11248	SA.2.SNP	25
		Polished Nickel 	11245	SA.2.PNP	25
		Electro Brass 	11246	SA.2.PVD	25
		Antique Brass 	12024	SA.2.AB	35
 <p>Slide Rail Drop Plate</p>		Silver	12154	SA.DP.SE	25
 <p>Slide Rail Drop Plate</p>		White	12007	SA.DP.WH	35
 <p>Hold open device (Not for use on fire doors)</p>		Silver 	11251	SA.HO	25
 <p>Cushion stop</p>		White cushion stop	11249	SA.CS	25
<p>Fixing pack for the TS.11204</p>		Satin Nickel 	11958	FIX.2.114.SNP	100
		Polished Brass 	11957	FIX.2.114.PVD	100
<p>Intumescent Kit for uninsulated steel doors</p>		Black 	12407	IP.114SM	100
<p>Anti-Ligature</p>		Black 	12075	FIX.AL	-
<p>Slide Arm cover</p>		Satin Nickel 	12238	SAC.2.SNP	25
<p>Stop Block</p>		Black 	11236	SA.1.BLOCK	25